

# Standard Operating Procedure

## How to wrap the perfect pallet in 3 steps

Using the **GRIP** film dispenser



SYSTEMS  
**grip**®



### STEP 1

Wrap 3 times around the bottom of the pallet, with the skid plate flat to the floor.




### STEP 2

Rotate around the pallet moving upwards, with 100mm overlap as you go.

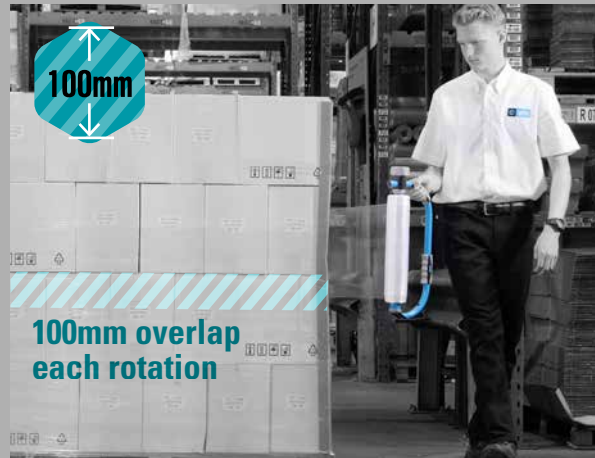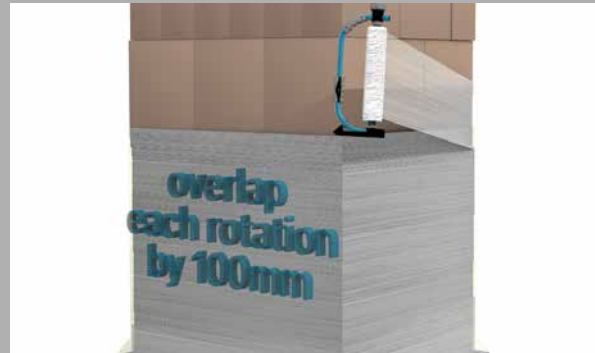

### STEP 3

Lastly, wrap 3 rotations around the top in order to fully secure the load.

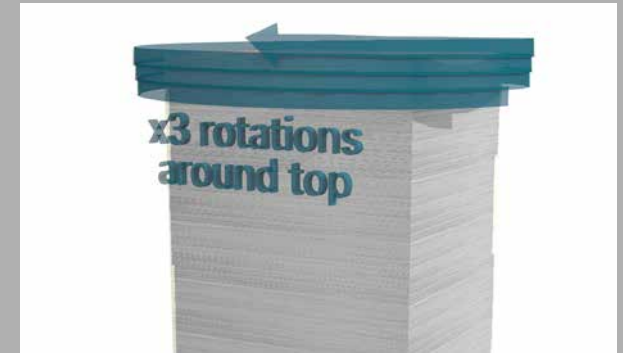



# HEALTH & SAFETY INFORMATION



SYSTEMS  
**grip**<sup>®</sup>

Improved ergonomics relieves stress on lower back and speeds up the wrapping process.

The unique design and application process when using GRIP<sup>®</sup> means you are always aware of your surroundings and potential hazards.

The lightweight construction of GRIP<sup>®</sup> makes it easy to maintain film tension - even when working at height.

The GRIP<sup>®</sup> robust skid plate allows you the flexibility to easily add extra load support.

## With GRIP<sup>®</sup>



## Without GRIP<sup>®</sup>

